

WINGERTER LABORATORIES, INC.
Engineering Testing & Inspection Services
1820 NE 144th Street, North Miami, FL 33181
Telephone (305) 944-3401 - Fax No. 949-8698

5-1-01 ko

No. 1

REPORT: MATERIALS STRENGTH TEST

CLIENT: Artistic Paver Manufacturing Company
PROJECT: Brick Paver Testing
LOCATION: WLI @ 1820 N.E. 144th Street, North Miami, Florida
REPORTED TO: Essig Pools, Inc.
15366 West Dixie Highway
North Miami Beach, Florida 33162 - Attn: Dan Essig

RESULTS OF TEST:

Test No: 2
Floor Surface Type: Coral finish paver brick.

Coefficient of Friction (Fc)

a) Before cleaning surface with Hillyard's Renovator.


Dry Neolite: 0.72
Wet Neolite: 0.64

b) After cleaning surface with Hillyard's Renovator.

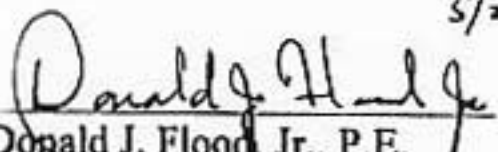
Dry Neolite: 0.70
Wet Neolite: 0.64

The client's representative was verbally notified of the above results at the time of this inspection.

Reported By:


Leon Chin-You
Dept. Manager
Building Inspector No. BN-0003292

Respectfully submitted,
WINGERTER LABORATORIES, INC.


Donald J. Flood, Jr., P.E.
Florida Registration No. 44847
Building Inspector No. BN-0003076

Inspector: LC
No. of Tests: 2

Order No. 01-2014

3